



## Health, safety and environmental risk assessment tool applied to site selection for geological hydrogen storage in saline aquifers

Antonio Hurtado<sup>a</sup>, Alicia López-Mederos<sup>a</sup>, Luis F. Mazadiego<sup>b</sup>, Ramón Rodríguez-Pons<sup>b</sup>, Laura M. Valle-Falcones<sup>c</sup>, Carlos Grima-Olmedo<sup>c</sup>, Sonsoles Eguilior<sup>a,\*</sup>

<sup>a</sup> Centro de Investigaciones Energéticas, Medioambientales y Tecnológicas, Avda. Complutense 40, Edif. 20, 28040, Madrid, Spain

<sup>b</sup> Departamento de Energía y Combustibles, Escuela Técnica Superior de Ingenieros de Minas y Energía, Ríos Rosas 23, 28003, Madrid, Universidad Politécnica de Madrid, Spain

<sup>c</sup> Departamento de Ingeniería Geológica y Minera, Escuela Técnica Superior de Ingenieros de Minas y Energía, Ríos Rosas 23, 28003, Madrid, Universidad Politécnica de Madrid, Spain

### ARTICLE INFO

Handling Editor: A Bhatnagar

#### Keywords:

Hydrogen storage  
HSE risks  
Site selection  
Aquifers  
Geological aspects

### ABSTRACT

Hydrogen (H<sub>2</sub>) emerges as a pivotal player in the transition to renewable energy sources. To address the seasonal fluctuations in energy dynamics, underground storage emerges as the most efficient approach, and saline aquifers within sedimentary basins as promising repositories for substantial H<sub>2</sub> volumes. However, this potential storage solution remains relatively unexplored. Conducting a comprehensive health, safety, and environment (HSE) risk assessment is vital for the technological advancement and public acceptance of geological H<sub>2</sub> storage sites. This study introduces a methodology designed to select and classify potential formations based on their HSE risks, offering a safety-oriented approach to identifying suitable storage sites. The proposed methodology underwent testing in two deep saline aquifers located in distinct geological contexts within the Iberian Peninsula. The aim of this study is to establish a foundation for further investigations and implementation of geological H<sub>2</sub> storage sites while ensuring safety and adhering to environmental and health standards.

### 1. Introduction

Climate change and global warming present significant challenges to humanity. In response, most countries are dedicated to promoting environmental sustainability, as outlined in various international agreements. In 2015, 195 countries signed the Paris Agreement, which established goals such as limiting “the increase in the global average temperature below 2 °C above pre-industrial levels,” reducing greenhouse gas emissions and primary energy consumption by 55% and 32.5%, respectively, by 2030 compared to 1990, and increasing the share of renewable energy consumption to 32%.

Following the 2021 United Nations Climate Change Conference (COP26), many countries, driven by climate concerns, strengthened their 2030 goals by committing to achieving net-zero emissions by 2070 [1]. Particularly, the European Union (EU) is actively involved in the energy transition to become a climate-neutral continent by the mid-21st century. The EU envisions that 55% of its energy mix will be contributed

by renewable sources by 2050, reducing fossil fuel consumption [2,3]. Consequently, the global energy system is transitioning towards renewable energy sources, primarily solar radiation and wind, leading to variations in energy production with atmospheric conditions. Therefore, an energy storage system is essential to balance differences between supply and demand.

Energy can be stored in various forms (electrochemical, mechanical, chemical, electrical, and thermal, among others), and the selected method relies on specific requirements such as amount of energy to be stored, frequency of use and storage, and efficiency, among others [4,5]. Storing unused energy in batteries or capacitors has two main disadvantages, namely their limited lifespan and low capacity [6,7]. To address these issues and enable prolonged energy storage, a plausible approach is to use hydrogen (H<sub>2</sub>) [8,9].

H<sub>2</sub> is not considered a primary energy source yet owing to the higher energy input required for its production compared to the energy output [10]. However, H<sub>2</sub> can be efficiently converted into electricity or heat,

\* Corresponding author.

E-mail addresses: [antonio.hurtado@ciemat.es](mailto:antonio.hurtado@ciemat.es) (A. Hurtado), [Alicia.lopez@ciemat.es](mailto:Alicia.lopez@ciemat.es) (A. López-Mederos), [luisfelipe.mazadiego@upm.es](mailto:luisfelipe.mazadiego@upm.es) (L.F. Mazadiego), [ramon.rodripons@upm.es](mailto:ramon.rodripons@upm.es) (R. Rodríguez-Pons), [lauramaria.valle@upm.es](mailto:lauramaria.valle@upm.es) (L.M. Valle-Falcones), [carlos.grima@upm.es](mailto:carlos.grima@upm.es) (C. Grima-Olmedo), [sonsoles.eguiliior@ciemat.es](mailto:sonsoles.eguiliior@ciemat.es) (S. Eguilior).

<https://doi.org/10.1016/j.ijhydene.2024.08.180>

Received 10 January 2024; Received in revised form 1 August 2024; Accepted 10 August 2024

Available online 17 August 2024

0360-3199/© 2024 The Authors. Published by Elsevier Ltd on behalf of Hydrogen Energy Publications LLC. This is an open access article under the CC BY license (<http://creativecommons.org/licenses/by/4.0/>).

rendering it a valuable energy carrier with capabilities for energy transport and storage [11,12]. H<sub>2</sub>, preferably produced from renewable sources, can be stored in geological formations and subsequently pumped to the surface to generate electrical energy during peak demand periods [13–15]. Underground H<sub>2</sub> storage (UHS) is an intriguing alternative, facilitating storage capacities on the order of GWh/TWh for weeks or months [16–18].

Research on UHS in deep geological formations is still in its early stages [19–21]. Various geological structures, such as salt domes, lined and unlined caverns in hard rock, depleted gas and oil fields, and deep saline aquifers, may be used to store H<sub>2</sub> [18,22–28]. Salt domes, in particular, are ideal for storing H<sub>2</sub> gas owing to their highly impermeable salt layer, minimising the probability of leakage [29]. Currently, they are the only tested UHS reservoirs, created through mining procedures to form an underground “storage tank” (Zhang et al., 2022). However, their drawback is limited storage capacity, contingent on the size and number of salt formations with the appropriate thickness and capacity [29,30].

Lined caverns are the newest of the four principal underground storage technologies, and hydrogen has not been stored in them. Because they are costly to develop, rock caverns are likely to be reserved for peaking facilities in regions without other storage options [28].

The thorough research conducted during the hydrocarbon production process highlights the undeniable advantages of utilising depleted gas and oil fields for hydrogen storage [31–33]. Owing to their extensive size, they can accommodate substantial volumes of gas, rendering them highly suitable for large-scale seasonal storage. Additionally, their geological structures contain watertight and well-preserved seal formations, such as structural or stratigraphic traps, which effectively seal the gas. Moreover, these fields are equipped with reusable surface and underground facilities, resulting in saving on implementation costs [22, 34].

Prior characterisation studies are necessary for site selection of saline aquifers to ensure structural reliability and integrity of the seal rock [32, 35,36]. However, saline aquifers lack existing well infrastructure, necessitating the procurement and installation of all surface and underground components. Thus, the development of saline aquifers is considerably more expensive compared to depleted fields. Despite this disadvantage, saline aquifers possess a high storage capacity and widespread globally positioning them as a viable option with the highest storage capacity [2,37].

The development of a roadmap for large-scale H<sub>2</sub> storage across Europe necessitates the assessment of environmental factors associated with this technology. The EU’s transition to a sustainable energy system requires effective management of public health and environmental effects [38,39]. Therefore, conducting a health, safety, and environment (HSE) risk assessment in the initial phase of storage site selection is crucial for estimating critical features, *a priori*, ensuring environmentally safe use and gaining public trust and acceptance of this technology [40]. Moreover, comparing risk levels between available storage sites will facilitate decision-making in their selection.

Currently, there is a lack of a formalised approach for conducting HSE risk assessment in the standardised H<sub>2</sub> storage site selection phase [41]. Similar to CO<sub>2</sub> storage in saline formations, the lack of characterisation data implies a high level of uncertainty during the initial stages [42]. To ensure operational and safety requirements are met, the site selection process must encompass multiple factors associated with gas accumulation under artificial conditions, causing stress imbalances in the geological complex and altering the chemical and flow balance. These changes may give rise to risks such as induced seismicity, fault reactivation, and seal formation failure. In such a scenario, leaked H<sub>2</sub> through the geological medium may reach the atmosphere and/or contaminate groundwater or surface water. Developing an HSE risk assessment methodology for H<sub>2</sub> storage site selection enables the study and assessment of initial information, retrieved from various sources and organised to ensure safety in assessing potential risks resulting from

changing natural conditions.

Considering the above, the primary aim of this study was to develop an HSE risk assessment methodology for the initial site selection phase. This methodology was designed to evaluate both site characteristics and information quality, enabling the assessment of site safety and identification of elements contributing most to safety. This, in turn, highlights actions required to reduce uncertainty.

To illustrate its utility, this methodology was applied to two pre-selected sites on the Iberian Peninsula identified as potential geological H<sub>2</sub> storage sites [43]. These sites are situated in two drainage basins with significantly different characteristics and varying quantities and qualities of available information. The available information is primarily qualitative and is derived from studies and reports on the study areas, sharing a common feature—they were not originally intended to provide safety data. Consequently, the conclusions drawn from the development and application of this methodology will serve as a valuable reference for future research endeavours aimed at enhancing the characterisation of potential H<sub>2</sub> storage sites.

## 2. Methodology

This methodology was devised for the preliminary assessment of HSE risks associated with geological H<sub>2</sub> storage projects in saline aquifers, considering their geological and geographic context. The methodological design facilitates systematic comparisons between storage sites, adapting to the specific needs of each project.

The conceptual framework of the approach developed in this study incorporates experiences from related technologies, such as CO<sub>2</sub> and natural gas storage, and other uses of the geological environment [44–46]. Additionally, this conceptual framework is based on a model designed to assess HSE risks during the preliminary selection of potential geological CO<sub>2</sub> storage sites [47]. This model underwent modifications to meet specific requirements and adapt to processes associated with H<sub>2</sub> injection, as they may influence the HSE safety of the storage complex. Although the fundamental properties of CO<sub>2</sub> and H<sub>2</sub> storage are similar (including good seal formation and storage rock, among others), the distinct properties of these gases (refer to Table 1) necessitate a specialised study.

The risks related to a H<sub>2</sub> storage project are associated with geo-mechanical, geochemical, hydrogeological, and microbial processes triggered by H<sub>2</sub> injection [41]. The resultant overpressure on the system displaces fluids from rock pores [48–50] and accumulates H<sub>2</sub> beneath the impermeable seal in the storage formation [51]. The assessment of H<sub>2</sub> storage safety should consider the following aspects.

- The effective functioning of the seal formation is crucial to prevent H<sub>2</sub> leakage from the structure [52]. Characteristics of H<sub>2</sub>, such as low viscosity and density and high diffusivity, which are influenced by factors such as brine salinity, pressure, temperature, and the presence of gases, enhance mobility, thereby increasing the risk of H<sub>2</sub> leakage through the seal rock [53–56]. Additionally, the high

**Table 1**

Comparison of some properties of hydrogen and carbon dioxide (Source: <https://encyclopedia.airliquide.com/>).

Property	H <sub>2</sub>	CO <sub>2</sub>
Molecular Weight (g/mol)	2.016	44.01
Critical temperature (°C)	−239.96	31.06
Critical pressure (bar)	13.13	73.83
Critical density (kg/m <sup>3</sup> )	31.43	468.19
Triple point temperature (°C)	−259.19	−56.56
Triple point pressure (bar)	0.077	5.187
Gas density (kg/m <sup>3</sup> ) at 1.013 bar and 25 °C	0.0823	1.8075
Compressibility Factor (Z) at 1.013 bar and 25 °C	1.0006	0.99496
Viscosity (poise) at 1.013 bar and 25 °C	8.9154·10 <sup>−5</sup>	1.4932·10 <sup>−4</sup>
Solubility in water (mol/mol) at 1.013 bar and 25 °C	1.411·10 <sup>−5</sup>	6.15·10 <sup>−4</sup>

reactivity of H<sub>2</sub> can lead to reactions with the seal rock, potentially dissolving minerals and creating new leakage pathways, posing a risk of containment loss [57]. Several studies, however, indicate that such reactions typically affect only a few meters of the seal rock, without compromising its overall integrity [58]. Nevertheless, this issue should be site-specifically evaluated for its significance. Another critical factor is assessing the capillary sealing efficiency, considering geochemical effects on the hydraulic integrity of the seal rock [59,60].

The integrity of the seal rock is influenced by changes in pore pressure and stress induced by gas injection. A substantial pressure increase during injection reduces the normal stress on the seal rock and potential fault surfaces, leading to mechanical rupture, fracture initiation, and fault reactivation. Additionally, diffusion leaks may arise from deficiencies in the seal rock due to undetected high-permeability zones or discontinuities (fractures and faults) in the seal rock [61,62].

- Injected H<sub>2</sub> influences the chemical equilibrium among dissolved gases, pore water in the reservoir formation, and the rock matrix. Dissolved H<sub>2</sub> reacts with components of pore water, altering the pH of the fluid and triggering mineral dissolution/precipitation reactions. These reactions can create preferential flow pathways associated with changes in rock porosity and permeability, thereby affecting site safety [41]. H<sub>2</sub> may also interact with microorganisms present at the site [63]. However, despite its economic importance due to H<sub>2</sub> consumption [64], this interaction does not pose HSE risks or disrupt the storage system. Consequently, this interaction was not considered in the development of the methodology.
- The pressure within the storage formation must be maintained within an appropriate range to minimise surface subsidence and/or induced seismicity. Insufficient operating pressures may lead to gradual reservoir rock incapacity to support the overlying rock mass, potentially causing compaction. Compaction rates vary across the reservoir due to spatially varying rock properties, resulting in fault formation to accommodate vertical movement from the compaction process. This movement along faults may induce seismicity or rock fracturing if the pressure exceeds the lithostatic pressure.
- Well integrity is crucial for H<sub>2</sub> storage safety, whether designed for H<sub>2</sub> storage or already present on-site. Specifically designed H<sub>2</sub> storage wells require rigorous application of technical and operational procedures to assess their integrity under storage operating conditions. However, evaluating the integrity of existing wells is more challenging due to uncertainties related to the molecular size and diffusion coefficient of H<sub>2</sub>. These properties enable H<sub>2</sub> penetration through materials such as steel used in existing wells and distribution systems, potentially affecting their strength [65].

Based on the aspects described above, this methodology indicates the HSE risk level according to the likelihood of H<sub>2</sub> leaks into aquifers or nearby habitats [66] and to information on the characteristics of the reservoir formation and seal and how they may respond to hydrodynamic, geochemical, and geomechanical changes associated with H<sub>2</sub> injection, and on the existence of faults and wells [67], which may compromise the integrity of the reservoir [68], and secondary seals on the storage complex and elements, which may limit the concentration of the gas in elements external to the storage formation.

These data aid in defining key characteristics for site assessment utilising the multi-barrier approach, namely a) primary containment (the site’s ability to contain a leak in the reservoir/seal pair), b) secondary containment (the capability to manage a fluid leak in the primary containment), and c) attenuation potential (the likelihood of attenuation once the primary formation leaks and the secondary containment fails) [47]. For assessment purposes, these features are deconstructed into a set of attributes and properties of the storage complex, which will function as proxies for the associated risks. [Table 2](#)

**Table 2**  
Features, attributes, and properties.

Features	Attributes	Properties	Proxy for
Primary containment	Primary seals	Thickness	Likely sealing effectiveness
		Lithology	Permeability, porosity
		Demonstrated sealing	Leakage potential
		Depth (distance below ground level)	Density, storage efficiency, capillarity
			Likely storage effectiveness
	Reservoirs	Lithology	Injectivity, capacity
		Permeability and porosity	Areal extent of injected plume
		Thickness	Migration potential
		Fracture or primary porosity	Capacity, tendency to fracture
		Pressure	Transport by groundwater
Secondary containment	Regional geology	Hydrology	Likelihood of well pathways
		Deep wells	Likelihood of fault pathways
		Fault permeability	Integrity and spill point
		Trapping mechanism	Induced fracturing, seismicity
		Stress state	Induced fracturing, seismicity
	Secondary seals	Tectonics	Likely sealing effectiveness
		Thickness	Permeability, porosity
		Lithology	Leakage potential
		Demonstrated sealing	H <sub>2</sub> plume spreading
		Topography	Plume dispersion
Attenuation potential	Surface characteristics	Wind	Plume dispersion
		Climate	Tendency for exposure
		Land use	Tendency for exposure
		Population	Form of seepage
			Dispersion/dissolution
	Groundwater hydrology	Surface water	Solubility
		Regional flow	Solubility
		Pressure	Solubility
		Geochemistry	Solubility
		Salinity	Direct pathway from depth
Existing wells	Deep wells	Direct pathway	
	Shallow wells	Direct pathway	
	Abandoned wells	Direct pathway, poorly known	
	Disposal wells	New fluids, disturbance	
		Large permeable fault zones	
Faults	Tectonic faults	Seal short-circuiting	
	Normal faults	Permeable fault zones	
	Strike-slip faults	Permeable fault zones	
	Fault permeability	Travel time	

provides a detailed overview of these characteristics, attributes, and properties.

The primary containment attributes include the primary seal of the formation, the reservoir, and the regional geological conditions. Each attribute is defined by a set of properties that serve as indicators (proxies) for its gas containment capability. Consequently, the reservoir and the primary seal of the formation are characterised by their geological features (lithology, permeability, porosity, thickness, and depth, among others) [21]. The regional geology of the site, reflecting

the initial state of the basin, includes the a) trapping mechanism, b) stress state, and c) basin tectonics. Initially, the basin is in equilibrium, but during gas injection and extraction, this equilibrium is disturbed, altering stresses and generating risks of induced seismicity or fault reactivation. Therefore, it is crucial to understand the trapping mechanism, assess whether the initial stresses in the basin are tensile or compressive, and determine the seismicity of the region (low, moderate or high).

Evaluating these structures involves recognising that UHS is a cyclic injection-extraction process designed for H<sub>2</sub> gas to meet energy demand when clean energy falls short [23,69]. Unlike geological CO<sub>2</sub> storage, which experiences compressive stresses, UHS exerts both compressive and tensile stresses cyclically on the ground throughout the project's lifespan, impacting site integrity [70,71]. Identifying existing faults and measuring the initial stress state of the basin are crucial in UHS risk assessment, with induced seismicity considered the most significant event for a potential leak [72].

Cyclic H<sub>2</sub> extraction and injection necessitate further characterisation studies of the terrain under successive stress changes at the site. The continuation of these studies will depend on the type of evaluation conducted in the present study, among other criteria. In this initial phase, the probability of induced seismicity is assessed based on the current stress state of the basin and the existence of faults with dips greater than 60°, as they are more likely to reactivate due to stress changes [69,73,74].

The properties of secondary containment mirror those of the primary containment seal (thickness, lithology, and seal layer tightness), excluding depth. Depth is linked to H<sub>2</sub> storage optimisation; therefore, considering this variable in secondary seals is irrelevant as they only mitigate risks.

Finally, the attenuation potential is influenced by factors such as surface terrain characteristics and groundwater hydrology, serving as retardants or diluents after a leak through the secondary seal. Other considerations for attenuation potential involve identifying direct pathways from the primary or secondary seal to the surface, including wells, interconnected fracturing systems, and faults. The risk magnitude associated with these factors varies based on well and fault types and characteristics [70].

Groundwater acts as a risk reduction attribute by delaying the gas's ability to reach the surface. Subsequent analyses must determine whether these aquifers contain exploitable drinking water to assess the risk of contamination. Surface characteristics, such as topography, climate, wind, land use, and distance to the nearest population, can reduce the time and/or concentration of the contaminant, thereby lowering the risk of exposure for the receptor (environment and society).

For risk assessment, each property is rated for its competence in fulfilling its role (proxy) on a scale from 2 (excellent quality) to –2 (poor quality). The level of certainty is also assessed, ranging from 2 for information from reliable sources directly measuring the property, through 1 for reliable but indirect sources, to 0.1 for highly indirect sources or unreliable information. Available characterisation data (expert knowledge, studies, reports, and publications) serve as a starting point for all assessments, contributing to the aim of assessing the HSE risk level and the corresponding certainty of these estimates. Uncertainty/certainty is maintained as both an input and output value in the methodology, considering the common lack of information in the early stages of a project affecting saline aquifers. In this study, uncertainty is broadly defined, encompassing both true uncertainty and parameter variability.

This methodology allows assigning different weights to each characteristic/attribute/property based on its relative importance for preventing or containing a leak. Expert judgment and related studies on the application of the methodology [45,47,59,75] have been utilised for this purpose (see supplementary information). In H<sub>2</sub> storage, the primary focus is to ensure that H<sub>2</sub> remains in the storage rock for subsequent extraction (linked to economic aspects). Therefore, ensuring the primary

containment of H<sub>2</sub> within the geological storage site is of utmost importance because the gas cannot be recovered after a leak from the reservoir rock.

Considering the above, this study developed a simple methodology for comparing, selecting, or rejecting storage sites in the initial stages of project development, taking into account their HSE risks.

### 3. Application of the methodology

To apply the methodology, two sites deemed *a priori* suitable for UHS, each with significantly different geological contexts, were selected for examination in this study. The first site is situated south of Reus, in the Ebro River basin, whereas the second site is located southwest of Córdoba, in the Guadalquivir River basin. The characteristics of these sites are outlined in the “*Plan de Selección y Caracterización de Áreas y Estructuras Favorables para el Almacenamiento Geológico de CO<sub>2</sub> en España*” [Plan for the Selection and Characterisation of Areas and Structures for Favourable Geological Storage of CO<sub>2</sub> in Spain], developed by the Geological and Mining Institute of Spain (*Instituto Geológico y Minero de España*; IGME) and the IRMC in 2009 (<https://info.igme.es/algeco2/>). The following provides a description of the selected sites.

#### 3.1. Reus site

The Reus site is notable for the high level of available knowledge about this area. Situated 3 km away from Reus, the region is characterised as relatively flat, although it experiences seasonal windiness. Coupled with a semi-humid climate, these conditions pose challenges for the attenuation potential in the event of a leak. Concerning hydrogeology, the site encompasses an aquifer subsystem in Baix Camp, from which water is extracted for irrigation. Consequently, six shallow wells are located near the study area, which also exhibits high nitrate concentrations due to agricultural activity [76].


The study area is situated in the Ebro River basin, a geological and structural component of the foreland basin of the Pyrenees (see Fig. 1). Examining the regional geological context of the Reus site, the north-eastern (NE) Iberian Peninsula has witnessed the convergence of the African and European tectonic plates. Tectonic phases in the NE Iberian Peninsula include Hercynian (late Hercynian phase) and Alpine (Pyrenean phase) orogenies, marked by compressive processes, alongside Neogene extensional processes associated with the Gulf of Lion and Valencia Trough margin evolution.

Over an extended period, spanning from the Upper Oligocene to the Aquitanian (Lower Miocene), a system of two fault types emerged: normal (dip-slip) and transfer (strike-slip) faults. NE-SW-trending normal faults led to the formation of several half-grabens or sedimentary sub-basins in the Catalan Coastal Ranges (Empordà, Vallès-Penedès, El Camp, and La Selva half-grabens). NW-SE-trending transfer faults (strike-slip faults), characterised by subvertical faults, caused lateral movement of blocks.

During the Burdigalian (Early Miocene), the tectonic regime shifted from extensional to compressional in the western part of the Western Mediterranean, reactivating previously normal faults with a reverse strike-slip component. Until the Upper Miocene, Miocene basins filled, bounded by normal faults and the Reus and Valls Half-grabens. The Reus site is situated in this area.

The transition between the Gulf of Lion structures and the continental margin features a NW-SE-trending Plio-Quaternary fault system known as the Transfer Zone. The Valls–Reus Depression or Valls–Reus Half-graben is a 60 km-long and 15 km-wide graben, generally tilted by numerous NW-dipping normal faults. Reactivated during the Tertiary and possibly the post-Miocene era as strike-slip faults with substantial horizontal translations.

The most powerful earthquake occurred in March 1927 in Vallès Oriental, registering an epicentral intensity of VII on the Medvedev–Sponheuer–Karnik scale. Presently, the stress state in the region is

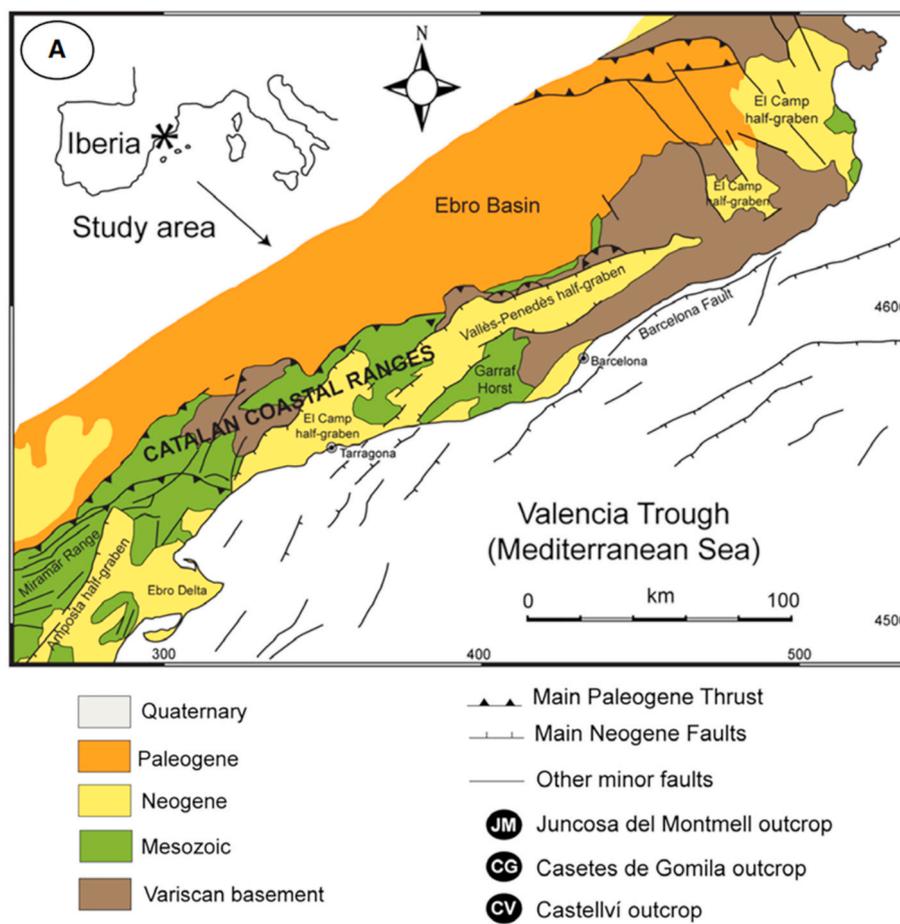

**Fig. 1.** Geological Map of the Catalan Coastal Ranges. The Reus site is situated in the El Camp graben, west of Tarragona, featuring the emergence of Neogene material [77].

secure, marked by compressive stresses. According to the 2012 seismic hazard map of Spain, published by the National Center for Geographic Information (*Centro Nacional de Información Geográfica – CNIG*) of the Directorate-General of the National Geographic Institute (*Instituto Geográfico Nacional – IGN*), this region experiences medium-low seismicity. For this preliminary study, disregarding induced seismicity, the medium-low seismicity is positive, indicating a lower likelihood of fault reactivation. In summary, this site is considered favourable for H<sub>2</sub> storage but not entirely reliable (Fig. 7).

The Reus site is distinguished by the presence of a seismogenic fault, the El Camp Fault, which, although originally a normal fault, currently functions as a slip fault. This fault is crucial in this study as it spans 40 km with a 60° dip and is currently under review by the National Security Council (*Consejo de Seguridad Nacional – CSN*) due to its association with Quaternary earthquakes.

Part of the NE-SW-trending fault system, the El Camp Fault initiated its activity as a normal fault in the early Neogene. It can be divided into three sections. The La Selva Sector, currently under CSN review since 2021, exhibits Quaternary activity with an earthquake recurrence interval of approximately 23,000 years. The Vilavella Sector has a slip rate of 0.03 m/ka and a recurrence interval of 17,000 years, whereas the L'Hospitalet Sector has a vertical slip rate of 0.02 m/ka and a recurrence interval of 30,000 years, with the last earthquake occurring 3000 years ago.

These manifestations align with the evolution of the regional stress state, transitioning from extensional stress (forming normal faults) in the Oligocene to the Miocene, to compressive or shear stress (forming strike-slip faults) in the Plio-Quaternary and present day.

Utilising existing boreholes, the main seal, reservoir, and surface

layers forming the secondary containment were accurately characterised. The Reus-1 borehole data, directly collected, confirm that the main storage site is an Upper Jurassic carbonate reservoir (see Fig. 2), featuring a 318 m-thick clay stratum (facies Garum) as the seal at a depth of 1432 m. The gross thickness of the storage unit is 144 m, with a net thickness of 66% of the gross thickness, and a culmination depth of 1400 m.

The formation water exhibits a salinity of 31,000 ppm ClNa. Conditions of low salinity and temperature promote microbial proliferation, unsuitable for H<sub>2</sub> storage [79]. The main storage comprises dolomites affected by paleokarstification processes, with 12% porosity and 144 m gross thickness. This high, karstified, and bevelled paleo-relief generates a trap mechanism, creating tight and impermeable conditions [78]. Published by the Geological and Mining Institute of Spain, this information enabled us to assess the primary containment of this storage complex.

The second seal, positioned at a depth of 412 m, is 43 m thick and consists of a layer of calcareous marly sandstones with a high clay content. Despite its depth and thickness, this containment may be deemed reliable for gas containment, although its lithology prevents it from being rated as highly effective. A H<sub>2</sub> storage site ideally features low porosity and permeability, found in halites, shales, and schists, to ensure a high retention capacity for small H<sub>2</sub> molecules [72].

For geological storage, the trapping mechanism is crucial as the primary gas retention mechanism. The high paleo-relief structure of this site creates a trapping mechanism that favours gas retention. During the injection process, the gas displaces the connate fluid to the bottom. Due to its lower density, H<sub>2</sub> diffuses through the storage rock towards the top of the layer, where the seal retains H<sub>2</sub>. Simultaneously, this movement of

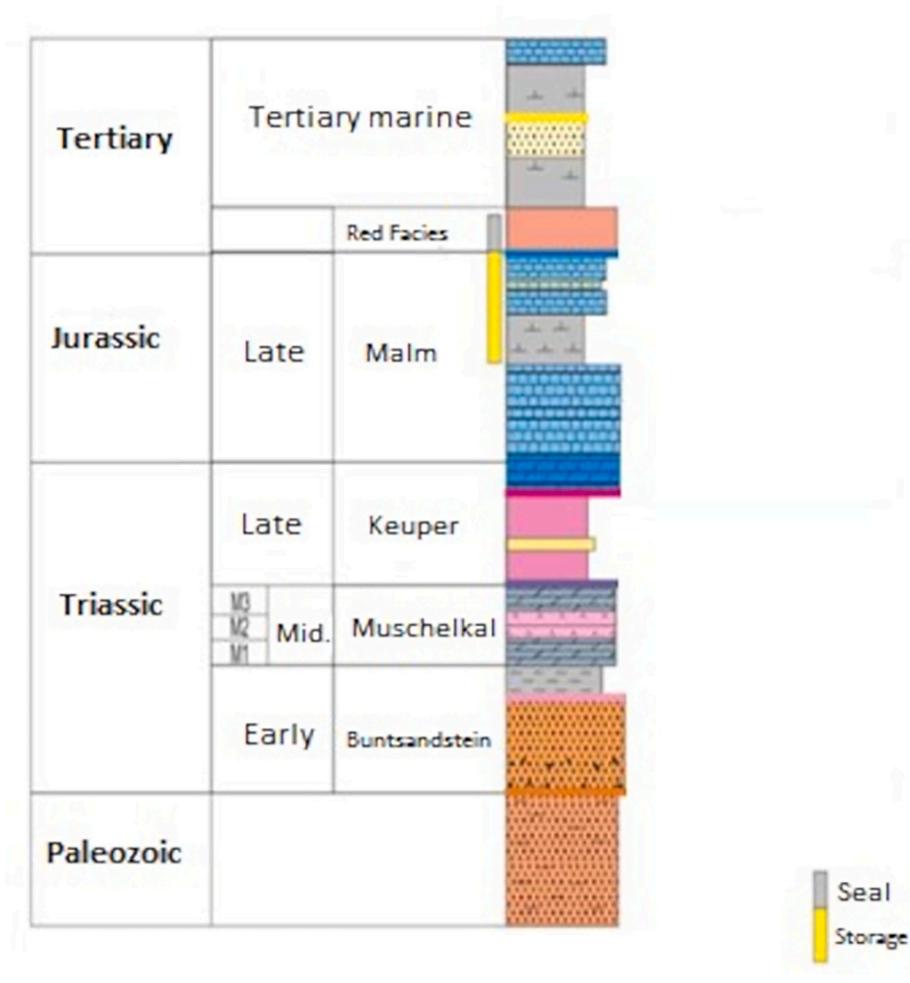


Fig. 2. Stratigraphic column of the Reus-1 borehole, situated in the Ebro basin [78].

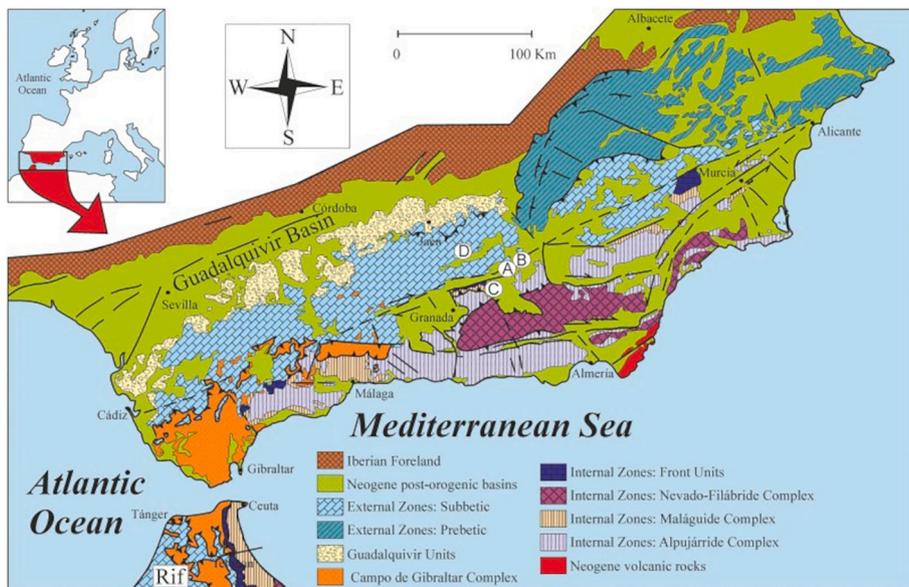


Fig. 3. Geological map of the Guadalquivir Basin. The area of interest exhibits materials from the post-orogenic Neogene [80].

fluids facilitates the spatial distribution of stresses.

### 3.2. Guadalquivir River site

The Guadalquivir River site is positioned within the Guadalquivir drainage basin, southwest of Córdoba (refer to Fig. 3). The area exhibits a monotonous terrain, encompassing both irrigated and dryland zones. It has an arid climate characterised by minimal wind and low precipitation. The potential injection point, represented by the Guadalquivir River N-1 borehole, is situated 10 km away from the nearest populated area and 12 km from the Guadalquivir River.

Upon analysing the hydrogeological characteristics of the region, a poorly compacted, multilayer aquifer system is identified directly above the storage complex, with no individual aquifer posing significant concern. This aquifer system is surrounded by several free aquifer subsystems, recharged by rainwater, including the aquifer system of the Altiplano de Écija [Écija Plateau]. These aquifer subsystems exhibit salinity levels ranging from 500 to 3000 mg/L and elevated concentrations of chlorides, sodium, nitrates, and magnesium, primarily attributed to agricultural activities [81].

The regional geological context of the Guadalquivir River Basin is characterised as a foreland basin of the Bética Cordillera, comprising a less-known Palaeozoic metamorphic substrate, an early Miocene Base Sands formation, and a Neogene infill divided into four sequences: Bética (Tortonian-Messinian), Andalucía (Messiniense s.s), Marismas (Messinian 2-Pliocene 1), and Odiel (Pliocene 2-Pleistocene) sequences (refer to Fig. 4).

The structural model of the basin is characterised by low-angle monoclines, extensional faults near the passive edge to the NW, and contractional faults in the active edge to the SE. The storage complex comprises traps formed by paleo-reliefs fossilised by the Miocene Base Sands formation. This formation serves as the regional reservoir in the Guadalquivir River Basin, forming a faulted anticlinal trap that dips towards the N. The throw of this trap exceeds 80–100 m, and there is uncertainty regarding the SE extension of its horst closure owing to the limited available seismic data [78].

The Guadalquivir N-1 borehole is situated above a turbiditic channel overlaying the fault trap at the Miocene – Palaeozoic unconformity, marked by a high-angle normal fault.

In contrast to the Reus site, the Guadalquivir River site remains insufficiently characterised. The main seal, located at a depth of 1000 m, is formed by clays and marls (Bética Sequence – Base Sands), whereas the reservoir comprises the Base Sands of the Guadalquivir River basin (Bética Sequence – Guadalquivir Sands) with a thickness of 22 m. The primary trap mechanism of the site corresponds to a trap with a 100 m

throw at the Miocene – Palaeozoic unconformity, and this structural confinement is considered highly reliable due to its thickness. For UHS, storage complexes with a relatively thin seal layer pose a higher risk of H<sub>2</sub> leakage; hence, the thickness of the seal should be > 20 m [82,83]. This complex includes 500 m of clay from the Bética Sequence, forming the primary seal.

The Guadalquivir River Basin (or “Surco Bético” [Baetic Basin]) took shape along a large wedge-shaped depression in a SW-NE direction, narrowing from Huelva – Cádiz to Jaén. The southern half of the basin consists of Burdigalian (Lower Miocene) Olistostromes, characterised by chaotically arranged blocks of Mesozoic and Cenozoic materials embedded in a loamy-clayey matrix. The basin commenced filling approximately 19 million years ago (Ma), during the Miocene.

The foreland basin has predominantly remained undeformed despite the compressional and extensional episodes of Alpine tectonics. Its geological evolution has been influenced by the relative movement of the African and Eurasian plates in a north-south direction between the Middle Oligocene and the Late Miocene, followed by an oblique convergence in a west-northwest direction up to the present day.

In the Bética Cordillera, the last significant compressional phase occurred in the Late Middle Miocene, around 12 Ma. Starting from the Tortonian, the penultimate stage of the Miocene, between 11.62 and 7.2 Ma, a widespread extensional regime developed in this area, giving rise to extensive half-grabens due to pre-existing fracturing. Therefore, the neotectonic period in the Bética Cordillera commenced in the Tortonian.

Normal faults in the Palaeozoic basement have affected the tabular cover and the Tertiary fill, although they do not reach the topographic surface, suggesting they may not be currently active. Some interpretations propose that these faults are indeed active but do not penetrate the upper section of the sequence due to deformation accommodating the more plastic Miocene sediments, resulting in blind faults.

From the Lower or Middle Quaternary, a compressional regime with an NNW-SSE direction led to reverse fault movements in inherited systems transverse to the main stress direction, from 1.5 to 1 Ma until the present.

In terms of seismotectonics, the area was influenced by the movement of the African and Eurasian plates between the Middle Oligocene and the Upper Miocene and is currently defined by a state of compressive stress resulting from the collision of the African and European plates [84]. None of the tectonic faults pose a risk of H<sub>2</sub> leakage to the surface. Moreover, no deep boreholes extend beyond the Guadalquivir River N-1 borehole, which was used to characterise the site. On one hand, this lack of boreholes is negative due to the scarcity of direct data to characterise the potential site. On the other hand, it is positive because deep

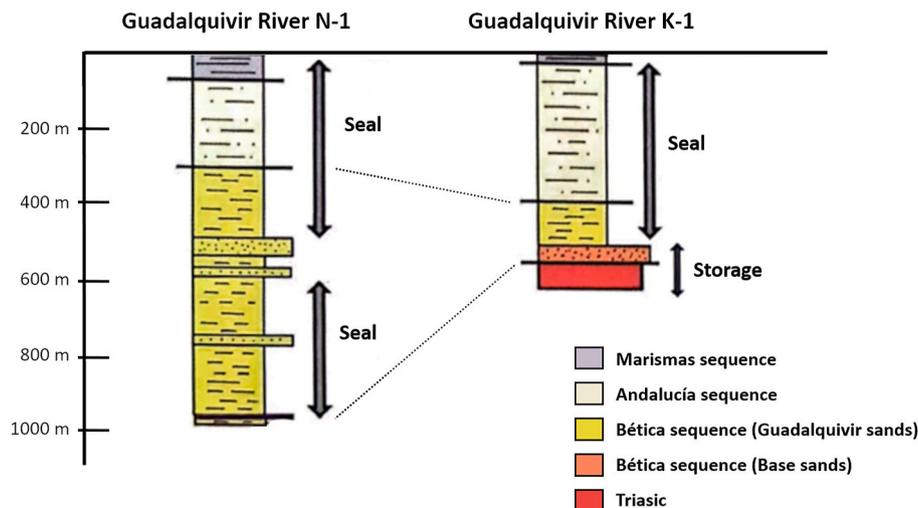


Fig. 4. Regional stratigraphic column of the Guadalquivir River Basin (Adapted from Ref. [78]).

anthropogenic escape routes could compromise the impermeability of this site.

The site was characterised based on the interpretation of seismic lines, analysis of the Río Guadalquivir River N-1 borehole (see Fig. 4), and extrapolations from boreholes around the Guadalquivir. The results indicate that this reservoir rock has approximately 20% porosity, 10<sup>2</sup> mD permeability, and 8000–10,000 ppm connate water salinity. However, the data for the Guadalquivir River site were collected indirectly, introducing a high level of uncertainty associated with its primary containment.

#### 4. Results and discussion

Figs. 5 and 6 illustrate that the selected sites exhibit favourable characteristics concerning safety levels and the certainty associated with the quality of the data.

The data quality of the Reus site aided in performing a preliminary assessment with a high certainty value. Its primary containment is expected to provide highly efficient H<sub>2</sub> retention, contrasting with the secondary containment, primarily due to the lithological and thickness characteristics of the seal formation, receiving a lower score. The attenuation potential is also rated as deficient, considering elements such as the proximity of the city of Reus, regional climate, and hydrology. Additionally, the El Camp fault poses an extra risk, as injection pressure could destabilise the current balance between blocks, prone to slipping due to a dip higher than 60°. On average, the site is favourable, scoring 0.88 on characteristics and 1.83 on certainty (see Fig. 5).

The Guadalquivir storage complex is initially a favourable site for H<sub>2</sub> storage. Its favourable characteristics include both depth and seal thickness of the primary containment, albeit with higher levels of data uncertainty than those of the other two characteristics. Additionally, elements such as the distance to the nearest urban centre and the absence of leakage elements, such as wells and faults, provide the site with good conditions from an attenuation potential standpoint. Conversely, the sealing capacity characteristics of the secondary containment do not favour H<sub>2</sub> storage primarily due to high heterogeneity and poor compaction. On average, the site is favourable, scoring 0.83 on characteristics and 1.50 on certainty (see Fig. 6).

Figs. 7 and 8, plotting the score of each attribute and its certainty, present a more detailed scale of the results mentioned above. The Reus site stands out for the low score of the attribute “Faults,” indicating the presence of faults near the site that may enable non-diffusive H<sub>2</sub> transport to the surface. This low score is influenced by the El Camp fault. In contrast, an attribute that receives a positive rating is “Groundwater Hydrology” because the Baix Camp aquifer subsystem provides the site

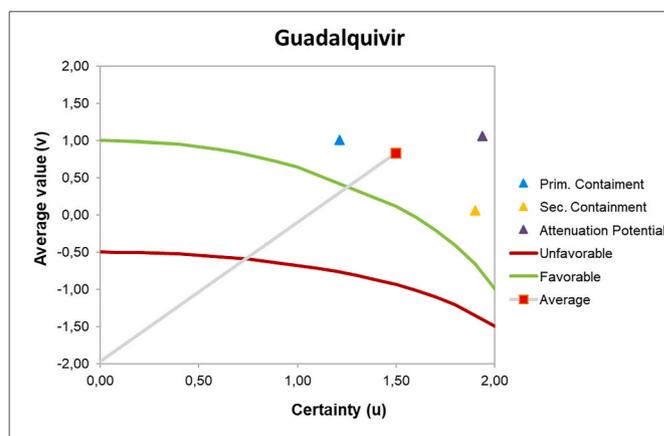


Fig. 6. Graph illustrating the average value as a function of certainty for the Guadalquivir River site, highlighting its favourable conditions considering data certainty and HSE risks associated with this site.

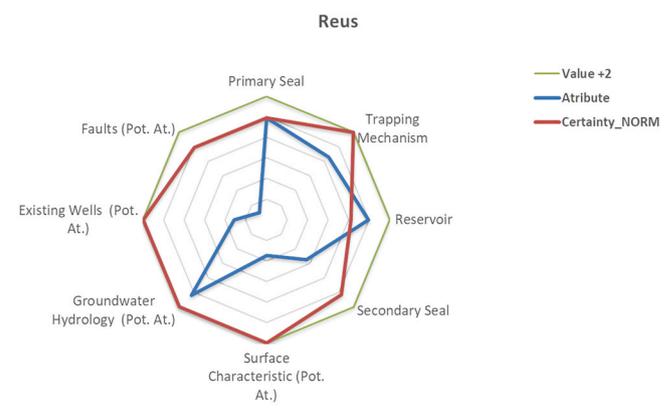


Fig. 7. Radar chart of the Reus site, illustrating the value of each attribute in blue and the certainty in orange. (For interpretation of the references to colour in this figure legend, the reader is referred to the Web version of this article.)

with a high attenuation potential in the event of a leak. However, these subsystems also pose a risk derived from their shallow water extraction wells, which lowers the favourability score of the site, as illustrated in the radar chart with the attribute “Existing Wells.”

The high level of knowledge about the location is evident in the certainty of each attribute, as depicted in the radar chart, where all attributes score higher than 1.

As shown in Fig. 8, the Río Guadalquivir River site scores high in favourable characteristics of the attribute “Reservoir,” albeit with high uncertainty due to the lack of direct data, such as data from boreholes reaching the reservoir rock, which raises questions about the reliability of the knowledge. Another attribute that stands out in the radar chart is “Surface Characteristic” because the site is not particularly suitable for coping with a potential H<sub>2</sub> leak due to the local topography and climate.

The attributes with the best scores were “Faults,” thanks to the absence of tectonic faults, followed by the attribute “Groundwater Hydrology” because the multilayer system in the secondary seal layers closest to the surface may facilitate H<sub>2</sub> diffusion and expansion in the event of a leak, thus mitigating the risk of gas accumulation, as observed in the Reus site.

#### 5. Conclusions

HSE risks associated with geological H<sub>2</sub> storage must be estimated to provide decision-makers with necessary and relevant information to


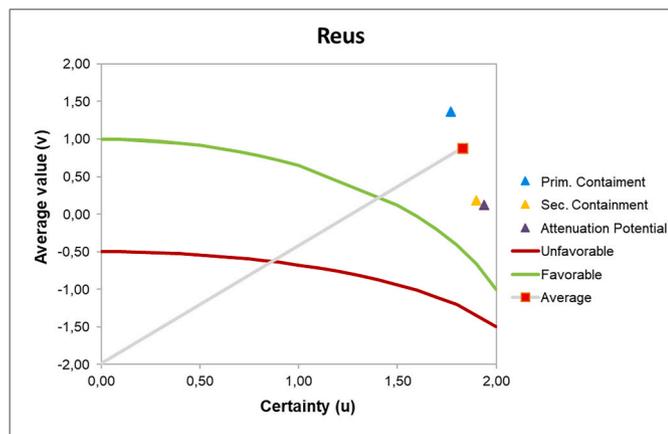


Fig. 5. Graph illustrating the average value as a function of certainty for the Reus site, emphasising its favourable conditions considering data certainty and HSE risks associated with this site.

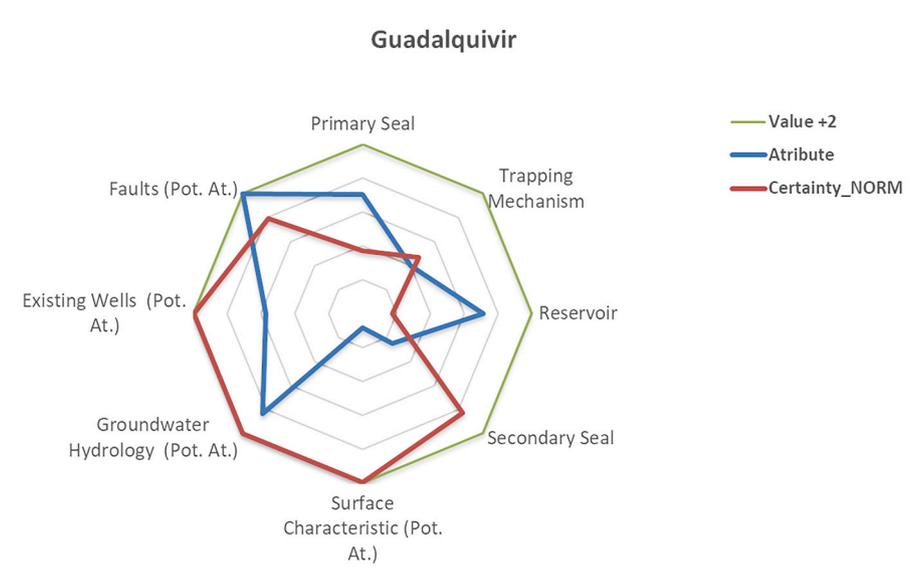

**Fig. 8.** Radar chart of the Guadalquivir River site, displaying the value of each attribute in blue and the certainty in orange. (For interpretation of the references to colour in this figure legend, the reader is referred to the Web version of this article.)

identify deviation controls that may interfere with the aims of such a project and facilitate the communication process with public stakeholders. Even with limited data, our risk assessment and analysis tool can identify, assess, and analyse potential risks associated with operations in geological H<sub>2</sub> storage sites, yielding crucial information for preliminarily selecting saline aquifer sites for such projects. Application of this approach to two potential sites demonstrates that these risks can be analysed considering favourability criteria and the quality of available data, based on their epistemic uncertainty and the natural variability of the elements under study. The transparency and simplicity of this systematic approach enable the evaluator to assign different weights and conduct new tests comparing the effects of these changes on the outcome of the site. In conclusion, despite the complexity of the risks associated with geological H<sub>2</sub> storage, our approach enables us to organise available data to assess safety, empowering decision-makers with useful information for future characterisation studies and for cost-effective resource allocation in implementing risk mitigation measures.

#### CRedit authorship contribution statement

**Antonio Hurtado:** Conceptualization, Formal analysis, Supervision, Writing – review & editing. **Alicia López-Mederos:** Data curation, Investigation, Software, Writing – original draft. **Luis F. Mazadiego:** Data curation, Supervision, Writing – review & editing. **Ramón Rodríguez-Pons:** Funding acquisition, Writing – review & editing. **Laura M. Valle-Falcones:** Resources, Software. **Carlos Grima-Olmedo:** Resources, Visualization. **Sonsoles Eguilior:** Conceptualization, Methodology, Validation, Writing – review & editing.

#### Declaration of competing interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

#### Acknowledgements

Translation Funding: by the Oil and Gas Engineering Master's degree (mip) of the Universidad Politécnica de Madrid (UPM), which is taught at the Escuela Técnica Superior de Ingenieros de Minas y Energía

(ETSIME).

#### Appendix A. Supplementary data

Supplementary data to this article can be found online at <https://doi.org/10.1016/j.ijhydene.2024.08.180>.

#### References

- [1] Muhammed NS, Haq B, Al Shehri D, Al-Ahmed A, Rahman MM, Zaman E. A review on underground hydrogen storage: insight into geological sites, influencing factors and future outlook. *Energy Rep* 2022;8:461–99. <https://doi.org/10.1016/j.egy.2021.12.002>. 2022.
- [2] Aftab A, Hassanpouryouzband A, Xie Q, Machuca LL, Sarmadivaleh M. Toward a fundamental understanding of geological hydrogen storage. *Ind Eng Chem Res* 2022;61:3233–53. <https://doi.org/10.1021/acs.iecr.1c04380>. 2022.
- [3] Tsiropoulos I, Nijs W, Tarvydas D, Ruiz Castello P. Towards net-zero emissions in the EU energy system by 2050 – insights from scenarios in line with the 2030 and 2050 ambitions of the European Green Deal, EUR 29981 EN. Luxembourg: Publications Office of the European Union; 2020. <https://doi.org/10.2760/081488,JRC118592>. 2020, ISBN 978-92-76-13096-3.
- [4] Chen H, Cong TN, Yang W, Tan C, Li Y, Ding Y. Progress in electrical energy storage system: a critical review. *Prog Nat Sci* 2009;19(3):291–312. <https://doi.org/10.1016/j.pnsc.2008.07.014>.
- [5] Kumar R, Lee D, Ağbulut Ü, Kumar S, Thapa S, Thakur A, Jilte RD, Saleel CA, Shaik S. Different energy storage techniques: recent advancements, applications, limitations, and efficient utilization of sustainable energy. *J Therm Anal Calorim* 2024;149:1895–933. <https://doi.org/10.1007/s10973-023-12831-9>. 2024.
- [6] U.S. Department of Energy. Hydrogen fuel cell engines and related technologies. 2001. <https://www.energy.gov/eere/fuelcells/hydrogen-and-fuel-cell-technologies-office>.
- [7] Dunn B, Kamath H, Tarascon JM. Electrical energy storage for the grid: a battery of choices. *Science* 2011;334(6058):928–35. <https://doi.org/10.1126/science.1212741>.
- [8] Matos CR, Carneiro JF, Silva PP. Overview of large-scale underground energy storage technologies for integration of renewable energies and criteria for reservoir identification. *J Energy Storage* 2019;21:241–58. <https://doi.org/10.1016/j.est.2018.11.023>. 2019.
- [9] Gür TM. Review of electrical energy storage technologies, materials and systems: challenges and prospects for large-scale grid storage. *Energy Environ Sci* 2018;11(10):2696–767. <https://doi.org/10.1039/C8EE01419A>.
- [10] IEA. Global hydrogen review 2021. International Energy Agency; 2021. Disponible en, <https://www.iea.org/reports/global-hydrogen-review-2021>.
- [11] Hassan Q, Algburi S, Sameen Az Jaszczur M, Salman HM. Hydrogen as an energy carrier: properties, storage methods, challenges, and future implications. *Environ Syst Decis* 2023. <https://doi.org/10.1007/s10669-023-09932-z>. 2023.
- [12] Rosen MA, Koohi-Fayegh S. The prospects for hydrogen as an energy carrier: an overview of hydrogen energy and hydrogen energy systems. *Eng. Ecol. Environ*. 2016;1:10–29. <https://doi.org/10.1007/s40974-016-0005-z>. 2016.
- [13] Bauer S, Beyer C, Dethlefsen F, Dietrich P, Duttmann R, Ebert M, Feeser V, Görke U, Köber R, Kolditz O, Rabbel W, Schanz T, Schäfer D, Würdemann H, Dahmke A.

- Impacts of the use of the geological subsurface for energy storage: an investigation concept. *Environ Earth Sci* 2013;70:3935–43. <https://doi.org/10.1007/s12665-013-2883-0>. 2013.
- [14] Büniger U, Michalski J, Crotogino F, Kruck O. Large-scale underground storage of hydrogen for the grid integration of renewable energy and other applications. *Compendium of hydrogen energy volume 4: hydrogen Use, safety and the Hydrogen economy. A volume in Woodhead Publishing Series in Energy* 2016: 133–63. <https://doi.org/10.1016/B978-1-78242-364-5.00007-5>. 2016.
- [15] Bailera M, Lisbona P, Romeo LM, Espatolero S. Power to Gas projects review: lab, pilot and demo plants for storing renewable energy and CO<sub>2</sub>. *Renew Sustain Energy Rev* 2017;69(2017):292–312. <https://doi.org/10.1016/j.rser.2016.11.130>.
- [16] Gabrielli P, Poluzzi A, Kramer GJ, Spiers C, Mazzotti M, Gazzani M. Seasonal energy storage for zero-emissions multi-energy systems via underground hydrogen storage. *Renew Sustain Energy Rev* 2020;121:109629. <https://doi.org/10.1016/j.rser.2019.109629>.
- [17] Jahanbakhsh A, Potapov-Crighton AL, Mosallanezhad A, Kaloorazi NT, Maroto-Valer MM. Underground hydrogen storage: a UK perspective. *Renew Sustain Energy Rev* 2024;189(Part B):114001. <https://doi.org/10.1016/j.rser.2023.114001>. 2024.
- [18] Bade SO, Taiwo K, Ndulue UF, Tomomewo OS, Oni BA. A review of underground hydrogen storage systems: current status, modeling approaches, challenges, and future prospective. *Int J Hydrogen Energy* 2024;80(2024):449–74. <https://doi.org/10.1016/j.ijhydene.2024.07.187>.
- [19] Muhammed N, Gbadamosi AO, Epelle E, Abdulrasheed A, Haq B, Patil S, Al Shehri D, Shahzad Kamal M. Hydrogen production, transportation, utilization, and storage: recent advances towards sustainable energy. *J Energy Storage* 2023;73 (Part D):109207. <https://doi.org/10.1016/j.est.2023.109207>.
- [20] Tarkowski R. Perspectives of using the geological subsurface for hydrogen storage in Poland. *Int J Hydrogen Energy* 2017;42(1):347–55. <https://doi.org/10.1016/j.ijhydene.2016.10.136>.
- [21] Mattered S, Donda F, Tinivella U, Barison E, Le Gallo Y, Vincent C. First assessment of an area potentially suitable for underground hydrogen storage in Italy. *Int J Hydrogen Energy* 2023;48(47):17940–56. <https://doi.org/10.1016/j.ijhydene.2023.01.192>. 2023.
- [22] Chen F, Ma Z, Nasrabadi H, Chen B, Mehana MZS, Van Wijk J. Capacity assessment and cost analysis of geologic storage of hydrogen: a case study in Intermountain-West Region USA. *Int J Hydrogen Energy* 2023;48(24):9008–22. <https://doi.org/10.1016/j.ijhydene.2022.11.292>. 2023.
- [23] Valle-Falcones LM, Grima-Olmedo C, Mazadiego-Martínez LF, Hurtado A, Eguilior S, Rodríguez-Pons R. Green hydrogen storage in an underground cavern: a case study in salt diapir of Spain. *Appl Sci* 2022;12(12):6081. <https://doi.org/10.3390/app12126081>. 2022.
- [24] Scafield J, Wilkinson M, Gilfillan SMV, Heinemann N, Haszeldine RS. A quantitative assessment of the hydrogen storage capacity of the UK continental shelf. *Int J Hydrogen Energy* 2021;46(12):8629–39. <https://doi.org/10.1016/j.ijhydene.2020.12.106>. 2021.
- [25] Zeng L, Sander R, Chen Y, Xie Q. Hydrogen storage performance during underground hydrogen storage in depleted gas reservoirs: a review. *Engineering* 2024. <https://doi.org/10.1016/j.eng.2024.03.011>. 2024.
- [26] Zeng L, Sarmadivaleh M, Saedi A, Chen Y, Zhong Z, Xie Q. Storage integrity during underground hydrogen storage in depleted gas reservoirs. *Earth Sci Rev* 2023;247:104625. <https://doi.org/10.1016/j.earscirev.2023.104625>. 2023.
- [27] Saadat Z, Farazmand M, Sameti M. Integration of underground green hydrogen storage in hybrid energy generation. *Fuel* 2024;371(Part A):131899. <https://doi.org/10.1016/j.fuel.2024.131899>. 2024.
- [28] Hematpur H, Abdollahi R, Rostami S, Haghghi M, Blunt MJ. Review of underground hydrogen storage: concepts and challenges. *Advances in Geo-Energy Research* 2023;7(2):111–31. <https://doi.org/10.46690/ager.2023.02.05>. 2023.
- [29] Caglayan DG, Weber N, Heinrichs HU, Linßen J, Robinius M, Kukla PA, Stolten D. Technical potential of salt caverns for hydrogen storage in Europe. *Int J Hydrogen Energy* 2020;45(11):6793–805. <https://doi.org/10.1016/j.ijhydene.2019.12.161>. 2020.
- [30] Tackie-Otoo BN, Haq MB. A comprehensive review on geo-storage of H<sub>2</sub> in salt caverns: prospect and research advances. *Fuel* 2024;356(2024):129609. <https://doi.org/10.1016/j.fuel.2023.129609>.
- [31] Tarkowski R, Uliasz-Misiak B. Towards underground hydrogen storage: a review of barriers. *Renew Sustain Energy Rev* 2022;162:112451. <https://doi.org/10.1016/j.rser.2022.112451>. 2022.
- [32] Zivar D, Kumar S, Foroozesh J. Underground hydrogen storage: a comprehensive review. *Int J Hydrogen Energy* 2021;46(45):23436–62. <https://doi.org/10.1016/j.ijhydene.2020.08.138>. 2021.
- [33] Kanaani M, Sedaee B, Asadian-Pakfar M. Role of cushion gas on underground hydrogen storage in depleted oil reservoirs. *J Energy Storage* 2022;45(2022): 103783. <https://doi.org/10.1016/j.est.2021.103783>.
- [34] Lord AS, Kobos PH, Borns DJ. Geologic storage of hydrogen: scaling up to meet city transportation demands. *Int J Hydrogen Energy* 2014;39(28):15570–82. <https://doi.org/10.1016/j.ijhydene.2014.07.121>. 2014.
- [35] Sainz-García A, Abarca E, Rubi V, Grandia F. Assessment of feasible strategies for seasonal underground hydrogen storage in a saline aquifer. *Int J Hydrogen Energy* 2017;42(26):16657–66. <https://doi.org/10.1016/j.ijhydene.2017.05.076>. 2017.
- [36] Wang H, Chen S, Deng P, Wang M, Xu Z. Pore-scale investigation of caprock integrity in underground hydrogen storage. Paper presented at the SPE Canadian energy technology conference and exhibition. 2024. <https://doi.org/10.2118/218099-MS>. Calgary, Alberta, Canada, March 2024.
- [37] Wang J, Wu R, Wei M, Bai B, Xie J, Li Y. A comprehensive review of site selection, experiment and numerical simulation for underground hydrogen storage. *Gas Science and Engineering* 2023;118:205105. <https://doi.org/10.1016/j.jgsce.2023.205105>. 2023.
- [38] Vivanco-Martín B, Iranzo A. Analysis of the European strategy for hydrogen: a comprehensive review. *Energies* 2023;16(9):3866. <https://doi.org/10.3390/en16093866>. 2023.
- [39] Weinberger B, Djizanne H, Pique S, Lahaie F, Bannach A, Wagler T, Stevenson R, Applewhite R. The regulatory framework of geological storage of Hydrogen in salt caverns. Sep 2023, Québec (CA), Canada. 10th international conference on hydrogen safety (ICHS 2023). 2023. p. 1090–102. <https://doi.org/10.1016/j.ijhydene.2023.10.043>. Part D, 2024.
- [40] De-León Almaraz S, Kocsis T, Azzaro-Pantel C, Szántó ZO. Identifying social aspects related to the hydrogen economy: review, synthesis, and research perspectives. *Int J Hydrogen Energy* 2024;49:601–18. <https://doi.org/10.1016/j.ijhydene.2023.10.043>. Part D, 2024.
- [41] Heinemann N, Alcalde J, Miocic JM, Hangx SJT, Kallmeyer J, Ostertag-Henning C, Hassanpouryouzband A, Thaysen EM, Strobel GJ, Schmidt-Hattenberger C, Edlmann K, Wilkinson M, Benthams M, Haszeldine RS, Carbonell R, Rudloff A. Enabling large-scale hydrogen storage in porous media- the scientific challenges. *Energy Environ Sci* 2021;14:853–64. <https://doi.org/10.1039/D0EE03536J>. 2021.
- [42] Hurtado A, Eguilior S, Rodrigo-Naharro J, Ma L, Recreo F. Risk assessment and mitigation tools. In: de Dios JC, Mishra S, Poletto F, Ramos A, editors. CO<sub>2</sub> injection in the network of carbonate fractures. *Petroleum engineering*. Cham: Springer; 2021. [https://doi.org/10.1007/978-3-030-62986-1\\_7](https://doi.org/10.1007/978-3-030-62986-1_7).
- [43] Smith N, Vincent C. Geological database report. *Hystories Deliverable D1.2-0 - Geological database report*. Ref. Ares(2022)2199580 - 25/03/2022 2022. *Report Number INIS-FR-22-0494*. INIS Volume53 INIS Issue27. 34 p. [https://hystories.eu/wp-content/uploads/2022/05/Hystories\\_D1.2-0-Geological-database-report.pdf](https://hystories.eu/wp-content/uploads/2022/05/Hystories_D1.2-0-Geological-database-report.pdf).
- [44] Tarkowski R, Uliasz-Misiak B, Tarkowski P. Storage of hydrogen, natural gas, and carbon dioxide – geological and legal conditions. *Int J Hydrogen Energy* 2021;46 (38):20010–22. <https://doi.org/10.1016/j.ijhydene.2021.03.131>.
- [45] Veiguela M, Hurtado A, Eguilior S, Recreo F, Roqueñi N, Loredó J. A risk assessment tool applied to the study of shale gas resources. *Sci Total Environ* 2016; 571(2016):551–60. <https://doi.org/10.1016/j.scitotenv.2016.07.021>.
- [46] Hurtado A, Eguilior S, Recreo F. Security assessment on geological storage of CO<sub>2</sub>: application to hontomin site. In: Vishal V, Singh T, editors. *Geologic carbon sequestration*. Cham: Springer; 2016. [https://doi.org/10.1007/978-3-319-27019-7\\_15](https://doi.org/10.1007/978-3-319-27019-7_15).
- [47] Oldenburg CM. Screening and ranking framework for geologic CO<sub>2</sub> storage site selection on the basis of health, safety, and environmental risk. *Environ Geol* 2008; 54:1687–94. <https://doi.org/10.1007/s00254-007-0947-8>. 2008.
- [48] Hosseini M, Fahimpour J, Ali M, Keshavarz A, Iglauer S. H<sub>2</sub>-brine interfacial tension as a function of salinity, temperature, and pressure; implications for hydrogen geo-storage. *J Petrol Sci Eng* 2022;213:110441. <https://doi.org/10.1016/j.petrol.2022.110441>. 2022.
- [49] Hashemi L, Blunt M, Hajibeygi H. Pore-scale modelling and sensitivity analyses of hydrogen-brine multiphase flow in geological porous media. *Sci Rep* 2021;11: 8348. <https://doi.org/10.1038/s41598-021-87490-7>. 2021.
- [50] Hashemi L, Glerum W, Farajzade R, Hajibeygi H. Contact angle measurement for hydrogen/brine/sandstone system using captive-bubble method relevant for underground hydrogen storage. *Adv Water Resour* 2021;154:103964. <https://doi.org/10.1016/j.advwatres.2021.103964>. 2021.
- [51] Raza A, Arif M, Glatz G, Mahmoud M, Al Kobaisi M, Alafnan S, Iglauer S. A holistic overview of underground hydrogen storage: influencing factors, current understanding, and outlook. *Fuel* 2022;330:125636. <https://doi.org/10.1016/j.fuel.2022.125636>. 2022.
- [52] Mahdi DS, Al-Khdheawi EA, Yuan Y, Zhang Y, Iglauer S. Hydrogen underground storage efficiency in a heterogeneous sandstone reservoir. *Advances in Geo-Energy Research* 2021;5(4):437–43. <https://doi.org/10.46690/ager.2021.04.08>. 2021.
- [53] Thiagarajan SR, Emadi H, Hussain A, Patange P, Watson M. A comprehensive review of the mechanisms and efficiency of underground hydrogen storage. *J Energy Storage* 2022;51(2022):104490. <https://doi.org/10.1016/j.est.2022.104490>.
- [54] Hemme C, van Berk W. Hydrogeochemical modeling to identify potential risks of underground hydrogen storage in depleted gas fields. *Appl Sci* 2018;8(11):2282. <https://doi.org/10.3390/app8112282>.
- [55] Ali M, Yekeen N, Pal N, Keshavarz A, Iglauer S, Hoteit H. Influence of organic molecules on wetting characteristics of mica/H<sub>2</sub>/brine systems: implications for hydrogen structural trapping capacities. *J Colloid Interface Sci* 2022;608:1739–49. <https://doi.org/10.1016/j.jcis.2021.10.080>. 2022.
- [56] Ali M, Yekeen N, Pal N, Keshavarz A, Iglauer S, Hoteit H. Influence of pressure, temperature and organic surface concentration on hydrogen wettability of caprock; implications for hydrogen geo-storage. *Energy Rep* 2021;7:5988–96. <https://doi.org/10.1016/j.egy.2021.09.016>. 2021.
- [57] Jia S, Wen C, Fu X, Liu T, Xi Z. A caprock evaluation methodology for underground gas storage in a deep depleted gas reservoir: a case study for the X9 lithologic trap of langgu sag, bohai bay basin, China. *Energies* 2022;15:4351. <https://doi.org/10.3390/en15124351>. 2022.
- [58] Zeng L, Vialle S, Ennis-King J, Esteban L, Sarmadivaleh M, Saout J, Dautria J, Giwelli A, Xie Q. Role of geochemical reactions on caprock integrity during underground hydrogen storage. *J Energy Storage* 2023;65(2023):107414. <https://doi.org/10.1016/j.est.2023.107414>.
- [59] Uliasz-Misiak B, Lewandowska-Smierczalska J, Matula R. Selection of underground hydrogen storage risk assessment techniques. *Energies* 2021;14(23): 8049. <https://doi.org/10.3390/en14238049>.
- [60] Esfandyari H, Sarmadivaleh M, Esmaeilzadeh F, Ali M, Iglauer S, Keshavarz A. Experimental evaluation of rock mineralogy on hydrogen-wettability: implications

- for hydrogen geo-storage. *J Energy Storage* 2022;52:104866. <https://doi.org/10.1016/j.est.2022.104866>. 2022.
- [61] van der Valk K, van Unen M, Brunner LG, Groenenberg RM. Inventory of risks associated with underground storage of compressed air (CAES) and hydrogen (UHS), and qualitative comparison of risks of UHS vs. underground storage of natural gas (UGS). Report number: tno 2020 R12005. <http://resolver.tudelft.nl/uu/id:4a8bfbac-9b18-4499-945c-807c6ca7872e>; 2020.
- [62] Liu J, Zhang T, Sun S. Molecular mechanisms of hydrogen leakage through caprock in moisture and residual gas conditions: a molecular dynamics–Monte Carlo study. *Phys Fluids* 2024;36(2):022024. <https://doi.org/10.1063/5.0188411>. 1 February 2024.
- [63] Heinemann N, Booth MG, Haszeldine RS, Wilkinson M, Scafidi J, Edlmann K. Hydrogen storage in porous geological formations - onshore play opportunities in the midland valley (Scotland, UK). *Int J Hydrogen Energy* 2018;43:20861–74. <https://doi.org/10.1016/j.ijhydene.2018.09.149>. 2018.
- [64] Thaysen EM, Armitage T, Slabon L, Hassanpouryouzband A, Edlmann K. Microbial risk assessment for underground hydrogen storage in porous rocks. EGU General Assembly 2023;2023. <https://doi.org/10.5194/egusphere-egu23-1909>. Vienna, Austria, 24–28 Apr 2023, EGU23-1909.
- [65] Melaina MW, Antonia O, Penev M. Blending hydrogen into natural gas pipeline networks: a review of key issues. Technical Report NREL/TP-5600-51995, National Renewable Energy Laboratory, <https://www.nrel.gov/docs/fy13osti/51995.pdf>; 2013.
- [66] Navaid HB, Emadi H, Watson M. A comprehensive literature review on the challenges associated with underground hydrogen storage. *Int J Hydrogen Energy* 2023;48(28):10603–35. <https://doi.org/10.1016/j.ijhydene.2022.11.225>. 2023.
- [67] Ugarte ER, Salehi S. A review on well integrity issues for underground hydrogen storage. *ASME. J. Energy Resour. Technol.* 2021;144(4):042001. <https://doi.org/10.1115/1.4052626>. April 2022.
- [68] Rutqvist J. The geomechanics of CO<sub>2</sub> storage in deep sedimentary formations. *Geotech Geol Eng* 2012;30:525–51. <https://doi.org/10.1007/s10706-011-9491-0>. 2012.
- [69] Iglauer S. Optimum geological storage depths for structural H<sub>2</sub> geo-storage. *J Petrol Sci Eng* 2022;212:109498. <https://doi.org/10.1016/j.petrol.2021.109498>. 2022.
- [70] Kumar KR, Honorio H, Chandra D, Lesueur M, Hajibeygi H. Comprehensive review of geomechanics of underground hydrogen storage in depleted reservoirs and salt caverns. *J Energy Storage* 2023;73(Part B):108912. <https://doi.org/10.1016/j.est.2023.108912>. 2023.
- [71] Saeed M, Jadhawar P. Modelling underground hydrogen storage: a state-of-the-art review of fundamental approaches and findings. *Gas Science and Engineering* 2024;121:205196. <https://doi.org/10.1016/j.jgsce.2023.205196>. 2024.
- [72] Lewandowska-Smierczalska J, Tarkowski R, Uliasz-Misiak B. Screening and ranking framework for underground hydrogen storage site selection in Poland. *Int J Hydrogen Energy* 2018;43:4401–14. <https://doi.org/10.1016/j.ijhydene.2018.01.089>. 2018.
- [73] Nacht PK, de Oliveira MFF, Roehl DM, Costa AM. Investigation of geological fault reactivation and opening. *Mec. Comput Times* 2010;29(2010):8687–97.
- [74] Álvarez del Castillo A, Alaniz-Álvarez SA, Nieto-Samaniego AF, Xu S, Ochoa-González GH, Velasquillo-Martínez LG. Software for determining the direction of movement, shear and normal stresses of a fault under a determined stress state. *Comput Geosci* 2017;104(2017):84–92. <https://doi.org/10.1016/j.cageo.2017.03.006>.
- [75] Hurtado A, Eguillor S, Recreo F. Methodological development of a probabilistic model for CO<sub>2</sub> geological storage safety assessment. *Int J Energy Environ Eng* 2014;5:84. <https://doi.org/10.1007/s40095-014-0084-6>. 2014.
- [76] IGME. Mapa hidrogeológico de España, Escala 1:50.000. View 1997. Reus, hoja 76. Vol. 472 33-18. 36p. link: [http://info.igme.es/cartografiadigital/datos/Hidrogeologico50/memorias/Memoria\\_Hidrogeologico50\\_472.pdf](http://info.igme.es/cartografiadigital/datos/Hidrogeologico50/memorias/Memoria_Hidrogeologico50_472.pdf). [Accessed 1 August 2023].
- [77] Baqués V, Travé A, Cantarero I. Development of successive karstic systems within the Baix Penedès Fault zone (onshore of the Valencia thorough, NW Mediterranean). *Geofluids* 2013;14:75–94. 2014.
- [78] Arenillas González A, Suárez Díaz I. Atlas de estructuras del subsuelo susceptibles de almacenamiento geológico de CO<sub>2</sub> en España. 2014. ISBN: 978-84-7840-935-8.
- [79] Khajooie S, Gaus G, Dohrmann AB, Krüger M, Littke R. Methanogenic conversion of hydrogen to methane in reservoir rocks: an experimental study of microbial activity in water-filled pore space. *Int J Hydrogen Energy* 2024;50:272–90. <https://doi.org/10.1016/j.ijhydene.2023.07.065>. Part D, 2024.
- [80] Pla-Pueyo S, Viseras C, Henares S, Yeste LM, Candy I. Facies architecture, geochemistry and paleoenvironmental reconstruction of a barrage tufa reservoir analog. Betic Cordillera, S. Spain) 2017. <https://doi.org/10.1016/j.quaint.2016.05.022>.
- [81] IGME. Mapa hidrogeológico de España. Escala 1:200.000, Córdoba, hoja 76. link: [http://info.igme.es/cartografiadigital/datos/Hidrogeologico200/memorias/Memoria\\_Hidrogeologico200\\_76.pdf](http://info.igme.es/cartografiadigital/datos/Hidrogeologico200/memorias/Memoria_Hidrogeologico200_76.pdf). [Accessed 8 August 2023].
- [82] Bouteldja M, Acosta T, Carlier B, Reveillere A, Jannel H, Fournier C. Definition of selection criteria for hydrogen storage site in depleted fields or aquifers. 2021. INIS-FR-22-0496).
- [83] Aggelopoulos CA, Robin M, Vizika O. Interfacial tension between CO<sub>2</sub> and brine (NaCl + CaCl<sub>2</sub>) at elevated pressures and temperatures: the additive effect of different salts. *Adv Water Resour* 2011;34:505–11. <https://doi.org/10.1016/j.advwatres.2011.01.007>. 2011.
- [84] Daza Sánchez A. Neotectónica y modelo estructural del Macizo Ibérico en Córdoba. *Energía & Minas: Revista Profesional, Técnica y Cultural de los Ingenieros Técnicos de Minas*. 2016. ISSN-e 1699-7743, N.º. 12, 2016, págs. 24-37.